

Compact 3/2 normally closed metal bodied valves with push-in air connections. Designed for the process duty cycle with high durability. Ideal for the process or packaging industry.

- High durability
- Very good repeat accuracy
- Design for process duty cycle
- Push-in connection
- Versatile and easily maintained
- Miniature size



**For ATEX specific products
contact Sales Office**

Bore Ø1,5 mm, flow 60 NI/min

Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Steel plunger	Spring	11	PXC-M111

Bore Ø1,5 mm, flow 85 NI/min

Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Plastic roller	Spring	4,5	PXC-M121
	Steel roller	Spring	4,5	PXC-M131

Bore Ø2,5 mm, flow 250 NI/min

Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Plastic roller	Spring	7	PXC-M521

Dimensions, Limit switches, Series PXC


All dimensions in mm unless otherwise stated

3/2 miniature limit switches

PXC-M111


PXC-Z12

PXC-Z11

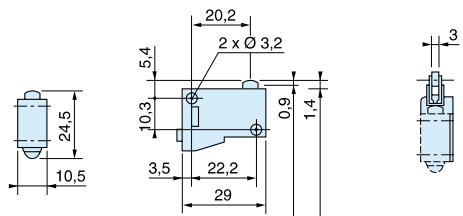

PXC-M121 - PXC-M131

PXC-M521

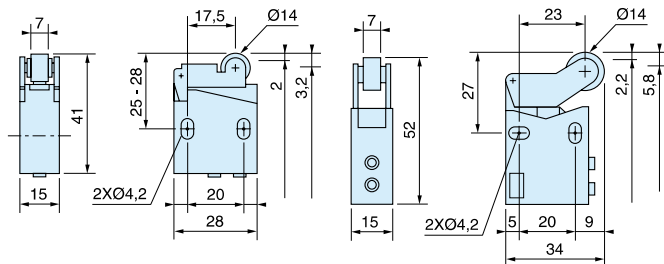

3/2 compact limit switches -

With Ø4mm Push-in connections with pipeable exhaust port


Bore Ø2,5mm, flow 250 NI/min - With plunger head

Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Steel plunger	Spring	24	PXC-M601A110
	Steel roller plunger	Spring	24	PXC-M601A102
	90° Steel roller plunger	Spring	24	PXC-M601A103

3/2 compact limit switches

PXC-M601A102

PXC-M601A103

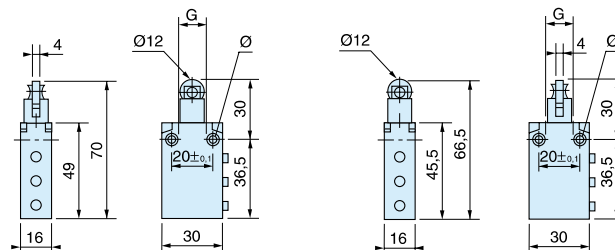

PXC-M601A110

